


CAT5 Cable - Industry-standard Category 5 (CAT5) straight-through unshielded twisted pair communication cable or better (CAT5e, CAT6)

MS/TP Cable - Twisted Pair Cable
 ? 22-24 AWG twisted pair, shielded jacketed communication cable
 ? Characteristic impedance of 100-120 ohms
 ? Capacitance of 17 pF/ft or lower
 ? Braided or aluminum foil shield
 ? Velocity of propagation of 65% or higher
 ? Suggested compatible cable products are Belden 9941, Belden 82841 and Winny City Wire 4200-5.

-2-Conductor 18-20 AWG, Unshielded
 -3-Conductor 18-20 AWG, Unshielded
 -5-Conductor 18-20 AWG, Unshielded

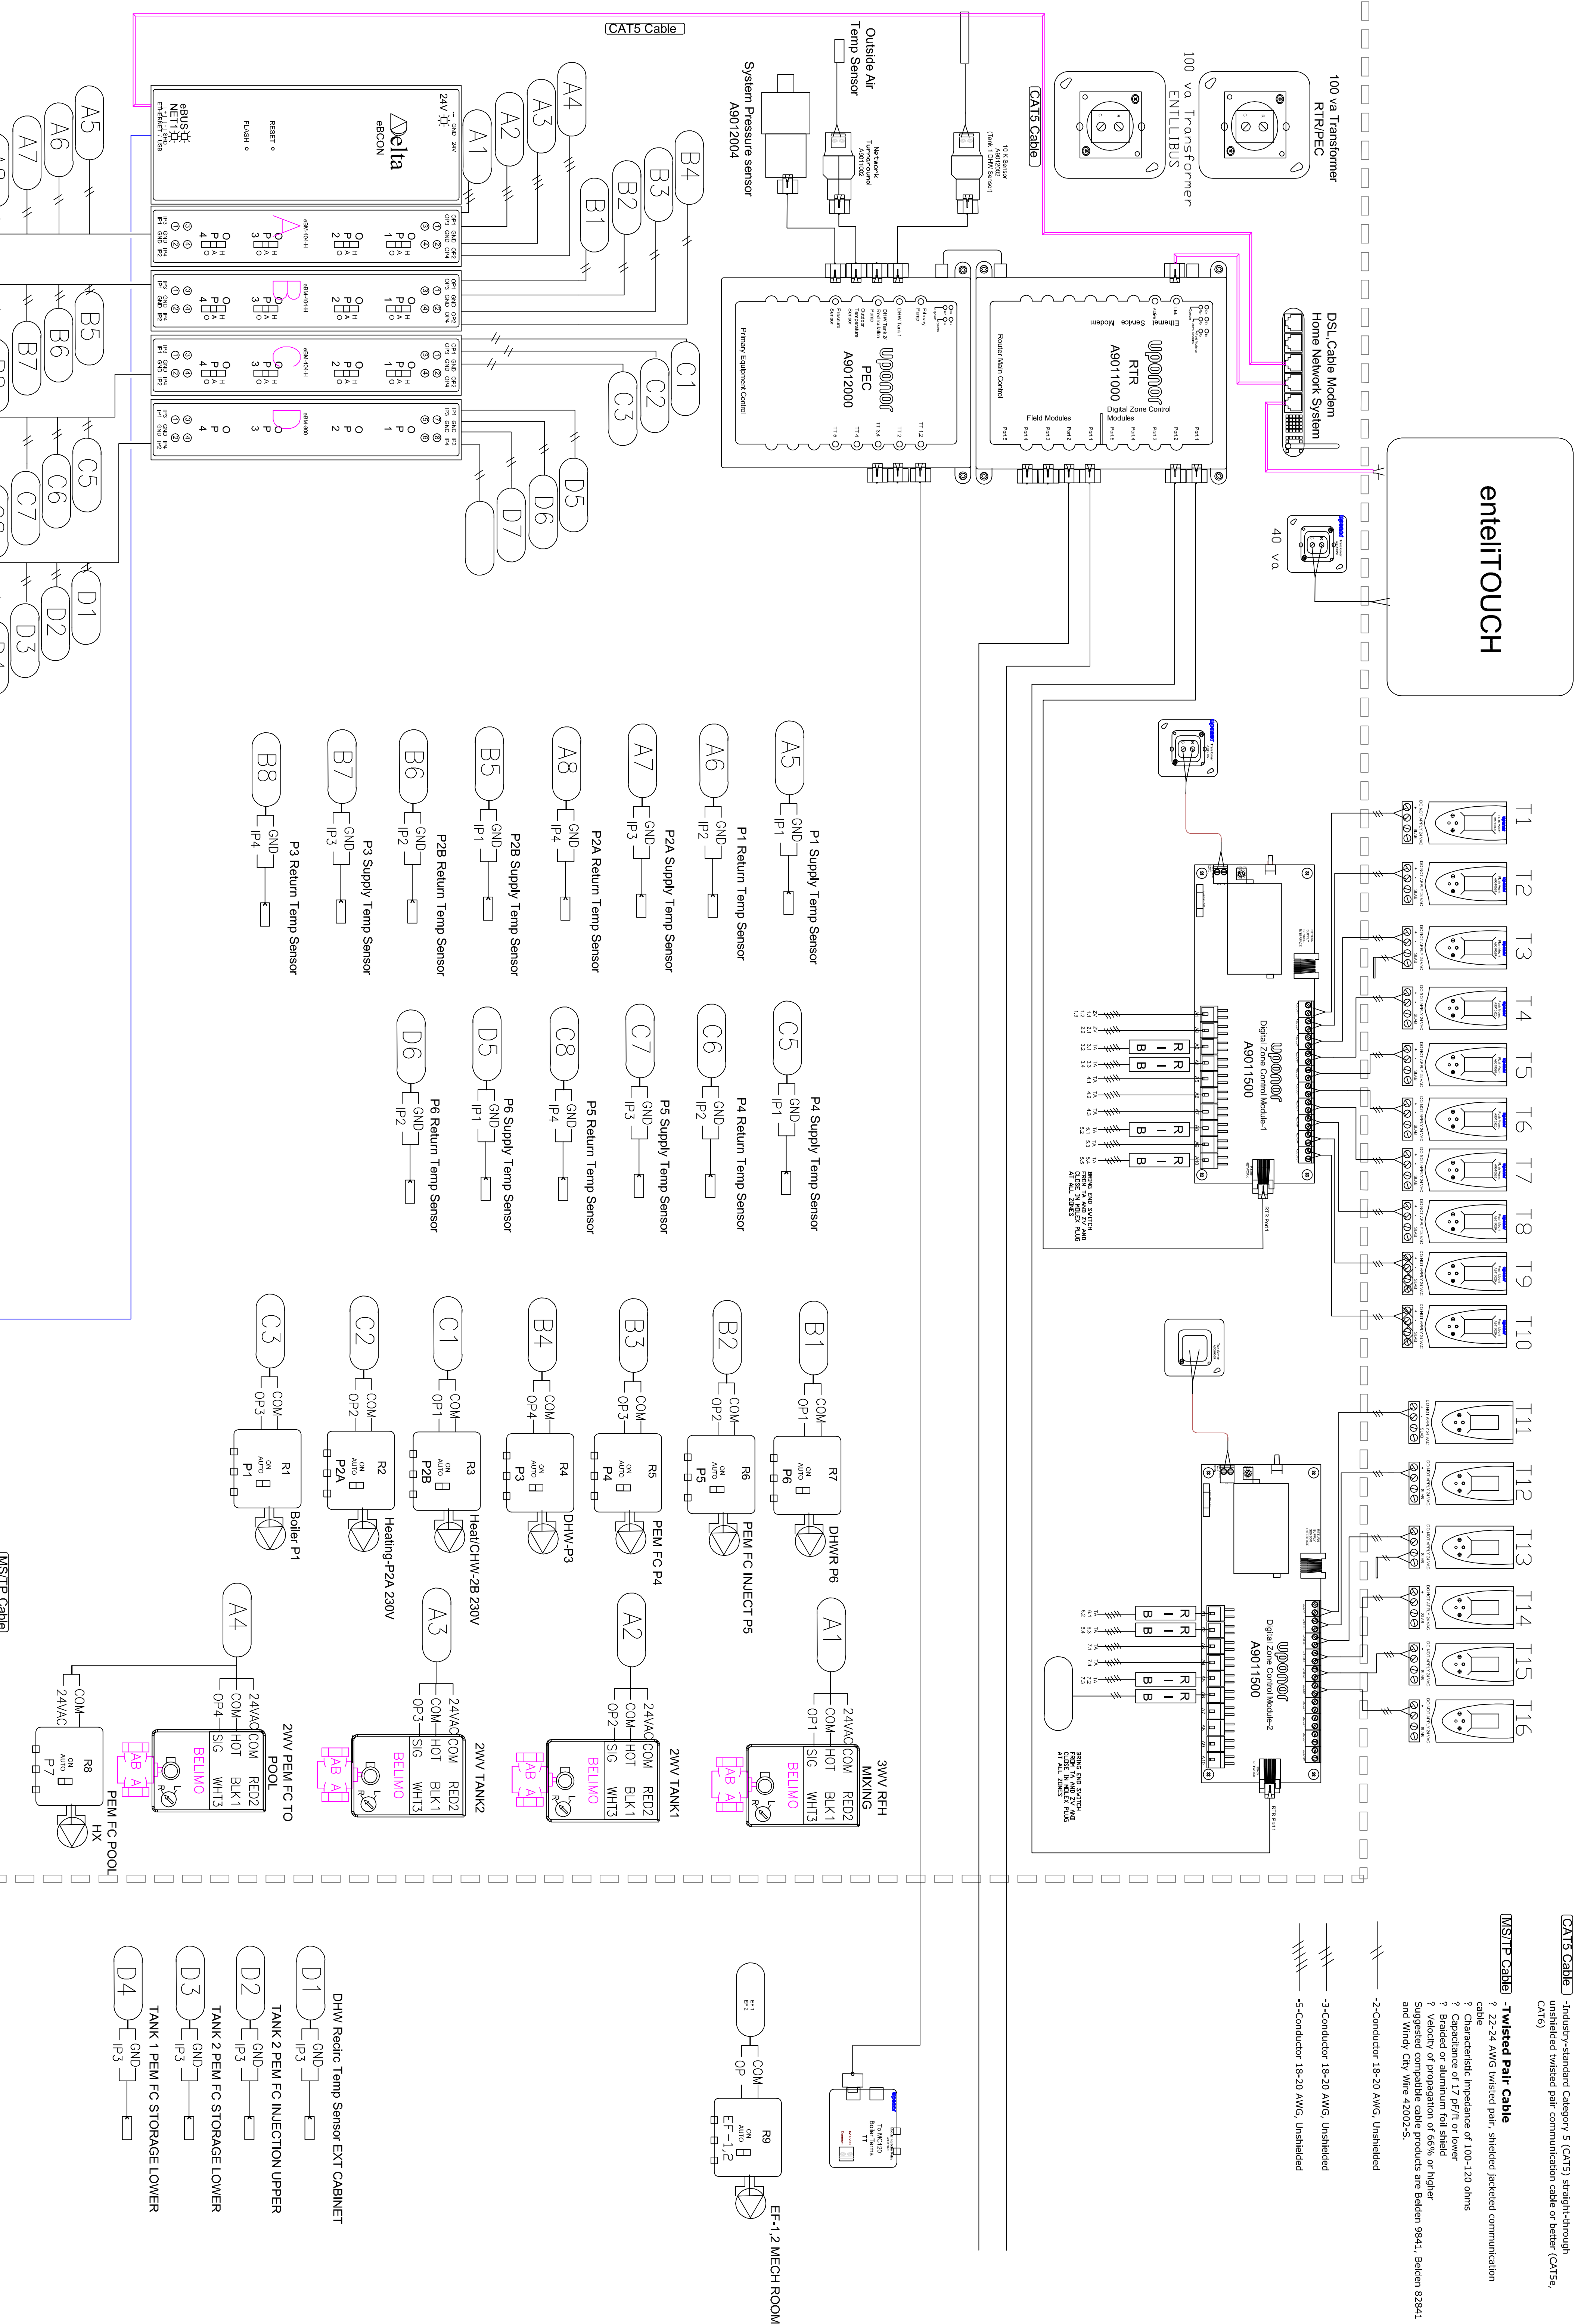

INSIDE CRS

DRAWN BY: MAC
 3-4-2011

This is a conceptual drawing only. It is not intended to describe a complete system. It determines the necessary components for and configuration of the particular system being installed, including additional equipment and components which are not shown. The contractor/engineer is responsible for determining which components are appropriate, in order to properly size and configure and design the system and to ensure that the system meets all applicable code requirements.